



## Large Document Shredder 16.50 S

High-performance large document shredder with a conveyor belt feed from the receiving table to the cutting mechanism



Convenient and fully-automatical workflow



Ensures a maximum of operation safety



Ensure highest user friendliness



Optimized interaction of the several drive parts

# Large Document Shredder 16.50 S



High-power, thermally protected geared electric motor (7.5 kW) and stable drive

Rugged, wear-resistant cutting rollers made from high-grade steel for optimum cutting performance

500 mm working width; suitable for all standard computer formats



## Space-saving solution

- Can be installed next to a wall
- Container is removed from the operator side

## Simple operation

- Audible “container full” signal
- Accompanying visual display for operator and cutting process is halted

## Standard safety equipment

- Wide EMERGENCY STOP BAR on receiving table for immediate stop in an emergency
- Lockable master switch and key switch
- Safety switch to stop machine if container is not in place
- Motor protection device with thermosensor and overload relay

## Mobile container


- Supplied as standard equipment
- Capacity 450 litres
- Ergonomic handle design for ease of handling
- Fold-down front panel for effortless removal of shredded material



## Useful add-on: Dust Extractor

- Standard design allows for connection of a dust extractor
- Appreciable improvement in air quality and working conditions
- Space-saving, mobile positioning next to the shredder



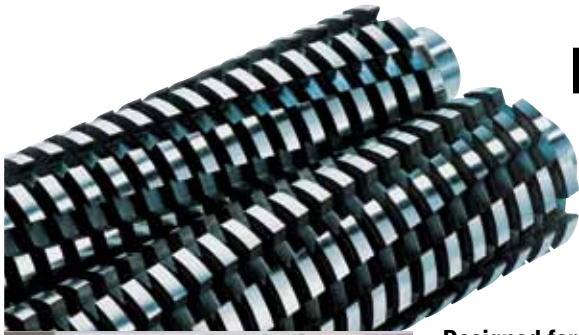

# Heavy Duty Shredder 16.50 S



## Designed for ease of operation

- Clearly laid out, rugged soft-touch keypad
- Audible and visual (LED) status displays
- Lockable master switch and key switch to prevent unauthorised use



## Trouble-free operation

- All system functions are microprocessor-controlled
- Automatic reverse and restart in case of overload



## Large feed table with integral conveyor belt

- Generously sized feed table for controlled, fatigue-free, safe and rapid loading
- Cutting mechanism readily accessible for maintenance



## Comprehensive safety features

- Extensive safety systems provided for all functions to protect the operator and the machinery
- VDE / GS approved and certified



Convenient and fully-automatical workflow



Ensures a maximum of operation safety



Ensure highest user friendliness



Optimized interaction of the several drive parts



## Shipping

- Packed in wooden crate
- Dimensions L x W x H  
1.770 x 1.320 x 1.210 mm
- Transport weight 785 kg

Figures for differing voltages upon request

## Large Document Shredder 16.50 S

Security class	DIN 32757-1	3	2	2
Size of shreds	mm	6 x 50	7.8 x 55	11.8 x 55
Shredding capacity*	sheets	300-330	350-420	400-550
Cutting speed	approx. m/sec	0.24	0.24	0.24
Working width	approx. mm	500	500	500
Collecting sack volume	l	450		
Filled weight	kg	40-55		
Sound level	dBA	74		
Power supply	Volt	400 / 3ph		
Motor power	kW	7.5		
Dimensions L x W x H	mm	1,950 x 1,200 x 1,550		
Weight	kg	726		


\* based on 70 g/m<sup>2</sup> A4 paper. Sheet capacities vary depending on quality, weight, grain of paper and sufficient power supply. It may be lower if the voltage is below the rated/nominal value.

\*\* depending on material and cutting width

# Installation Instructions

## intimus 16.50 S / Heavy Duty Shredder

Scale 1:40

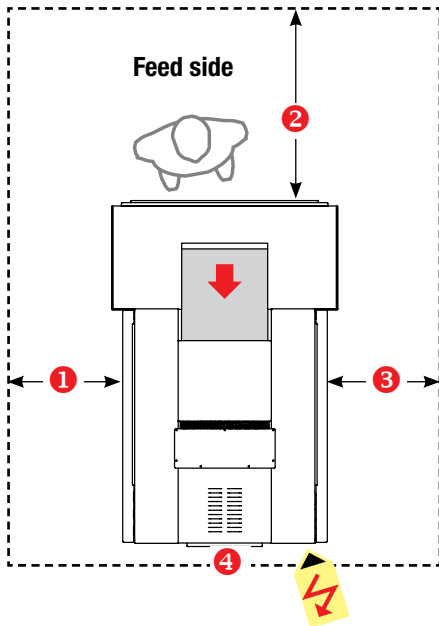

Dimensions	mm
① Length	1.845
② Height	1.550
③ Inlet height or desk height	1.200
④ Width	1.205

Required space / distances	mm
① min. 600	③ min. 600
② min. 1.000	④ min. 100



### Position of controls



### Power Supply

Power lead 3.15 m,  
supplied with Cekon CEE 32 A plug

### Required Fusing by customer

Miniature Circuit Breaker  
with tripping characteristic C  
or Fuse type gL / gG, coordination  
type 1 according to IEC / EN 60947-4-1

400-415 V / 50 Hz = 35 A slow blow  
220-230 V / 50-60 Hz = 40 A slow blow  
200 V / 50-60 Hz = 63 A slow blow

